





Luxecasting
International Group

SAFETY CAMLOCK

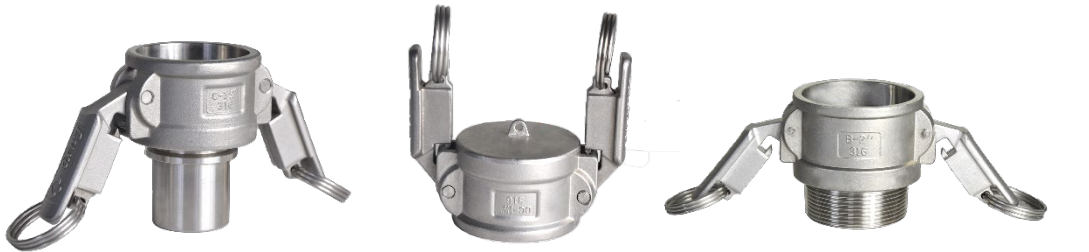

| | |
|-------------------------------|---|
| <u>Normative Regulation :</u> | EN 14 420-7 / MIL A-A-59326 A / DIN 2828 |
| <u>Sizes :</u> | From DN 3/4" up to DN 4" |
| <u>Coupling Material :</u> | Stainless Steel |
| <u>Gaskets Material :</u> | NBR , FPM , EPDM , PTFE , CSM , Envelop Gaskets |
| <u>Working Pressure :</u> | 25 bars |
| <u>Connection Mechanism :</u> | Pushing the Safety levers from the female part  |

Contact us for more information

info@luxecasting.com

